

# T estpassport問題集



---

更に上のクオリティ      更に上のサービス

一年で無料進級することに提供する  
[Http://www.testpassport.jp](http://www.testpassport.jp)

**Exam** : **4A0-105**

**Title** : Alcatel-Lucent Virtual  
Private LAN Services

**Version** : DEMO

1.Which of the following best describes the difference between VPWS and VPLS?

- A.VPWS is a point-to-point service where CEs are presented with point- to-point virtual circuits whereas VPLS is a bridged LAN service provided to a set of CEs that are members of a L2 VPN
- B.Unlike VPLS, VPWS allows CEs that are member of the same service instance to communicate with each other as if they are connected via a bridged LAN
- C.Unlike VPWS, VPLS provides customers to view the network as an unshared overlay link or circuit

Answer: A

2.The behavior of VPLS can be best described by which of the following statements?

- A.A frame should be sent only to the PE that connects to the target site of the frame whenever possible
- B.A frame should be flooded as little as possible
- C.Customer frames should be switched based on the destination MAC address
- D.Only (a) and (b) are true
- E.All of the above

Answer: E

3.Which of the following statements relating to VPLS are false?

- A.A VPLS is a multipoint Layer 2 service
- B.A VPLS allows multiple customer sites to be connected in a single bridged domain
- C.A VPLS on a single node requires a Service Distribution Path
- D.With VPLS Service provider can reuse their IP/MPLS infrastructure to offer multiple services
- E.The VPLS switches traffic based on MAC address associated to the appropriate SAP

Answer: C

4.True or False? Multiple VPLS services can be offered over the same set of LSP tunnels?

- A.True
- B.False

Answer: A

5.Which of the following contributes to VPLS implementation over MPLS?

- A.Connecting bridging-capable provider edge routers with a full mesh of MPLS LSP (label switched path) tunnels
- B.Negotiating per-service VC labels using draft-Martini encapsulation
- C.Replicating unknown and broadcast traffic in a service domain
- D.Enabling MAC learning over tunnel and access ports
- E.Using a separate forwarding information base (FIB) per VPLS service
- F.All of the above


Answer: F

6.Which of the following statements is false?

- A.VPLS is a bridged LAN service
- B.VPLS provides L2 VPN services to CEs
- C.VPLS is a point-to-point service where CEs are presented with point- to-point virtual circuits
- D.CEs that are members of the same VPLS service instance communicate with each other as if they are

connected  
via a bridged LAN  
Answer: C

7.Which SDP on R3 will MAC addresses be associated with for devices behind R2?

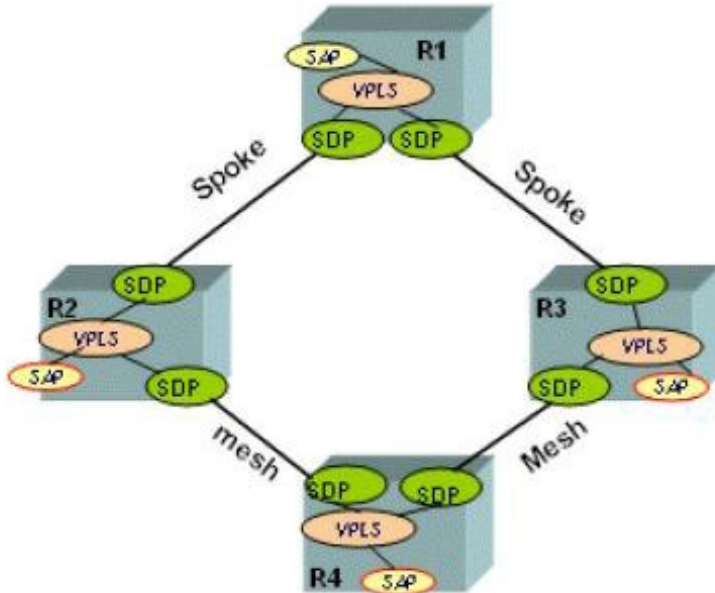

- A.It depends if traffic is received via R4 or R1 from devices behind R2
  - B.The devices cannot communicate based on the configuration in the diagram so there will be no mac address association
  - C.Devices behind R2 will be associated with the sdp between R3 and R1
  - D.Devices behind R2 will be associated with the sdp between R3 and R4
- Answer: C

8.Which of the following functions must a PE router support when participating in a VPLS network?

Choose all that apply.

- A.MAC learning
- B.Packet replication
- C.Proxy ARP
- D.Packet forwarding
- E.Flood all frames with an unknown destination MAC address to all PE routers associated with that VPLS

Answer: A B D E

9.Select the command from the list below that produced the following output.

Err Info	Local	Remote
Type:	VPLS	VPLS
Admin State:	Up	Up
Oper State:	Up	Up
Service-MTU:	1514	1514
Customer ID:	10	10
IP Interface State:	Up	
Actual IP Addr:	10.10.10.10	20.20.20.20
Expected Peer IP:	20.20.20.20	10.10.10.10
SDP Path Used:	Yes	Yes
SDP-ID:	10	10
Admin State:	Up	Up
Operative State:	Up	Up
Binding Admin State:	Up	Up
Binding Oper State:	Up	Up
Binding VC ID:	10	10
Binding Type:	Mesh	Mesh
Binding Vc-type:	Ether	Ether
Binding Vlan-vc-tag:	N/A	N/A
Egress Label:	131068	131070
Ingress Label:	131070	131068
Egress Label Type:	Signaled	Signaled
Ingress Label Type:	Signaled	Signaled

A.oam svc-ping 20.20.20.20 service 10 local-sdp remote-sdp

B.oam sdp-ping 10 resp-sdp 10

C.oam svc-ping 20.20.20.20 service 10 local-sdp

D.oam svc-ping 10.10.10.10 service 10 local-sdp remote-sdp

E.oam svc-ping 10.10.10.10 service 10 local-sdp

Answer: A

10. Based on the following output what will the vc-id be of any mesh-sdp bound to this service?

```
A:PE-Z>config>service# show service id 9000 base
=====
Service Basic Information
=====
Service Id       : 9000                Vpn Id           : 0
Service Type     : VPLS
Customer Id      : 100
Last Status Change: 02/12/2007 13:17:11
Last Mgmt Change : 02/12/2007 13:17:11
Admin State      : Up                  Oper State        : Up
MTU              : 1514                Def. Mesh VC Id   : 1000
SAP Count        : 0                  SDP Bind Count    : 1
Send Flush on Fail: Disabled

-----
Service Access & Destination Points
-----
Identifier                Type           AdmMTU  OprMTU  Adm    Opr
-----
=====
```

A.9000

B.1514

C.1000

D.0

Answer: C